

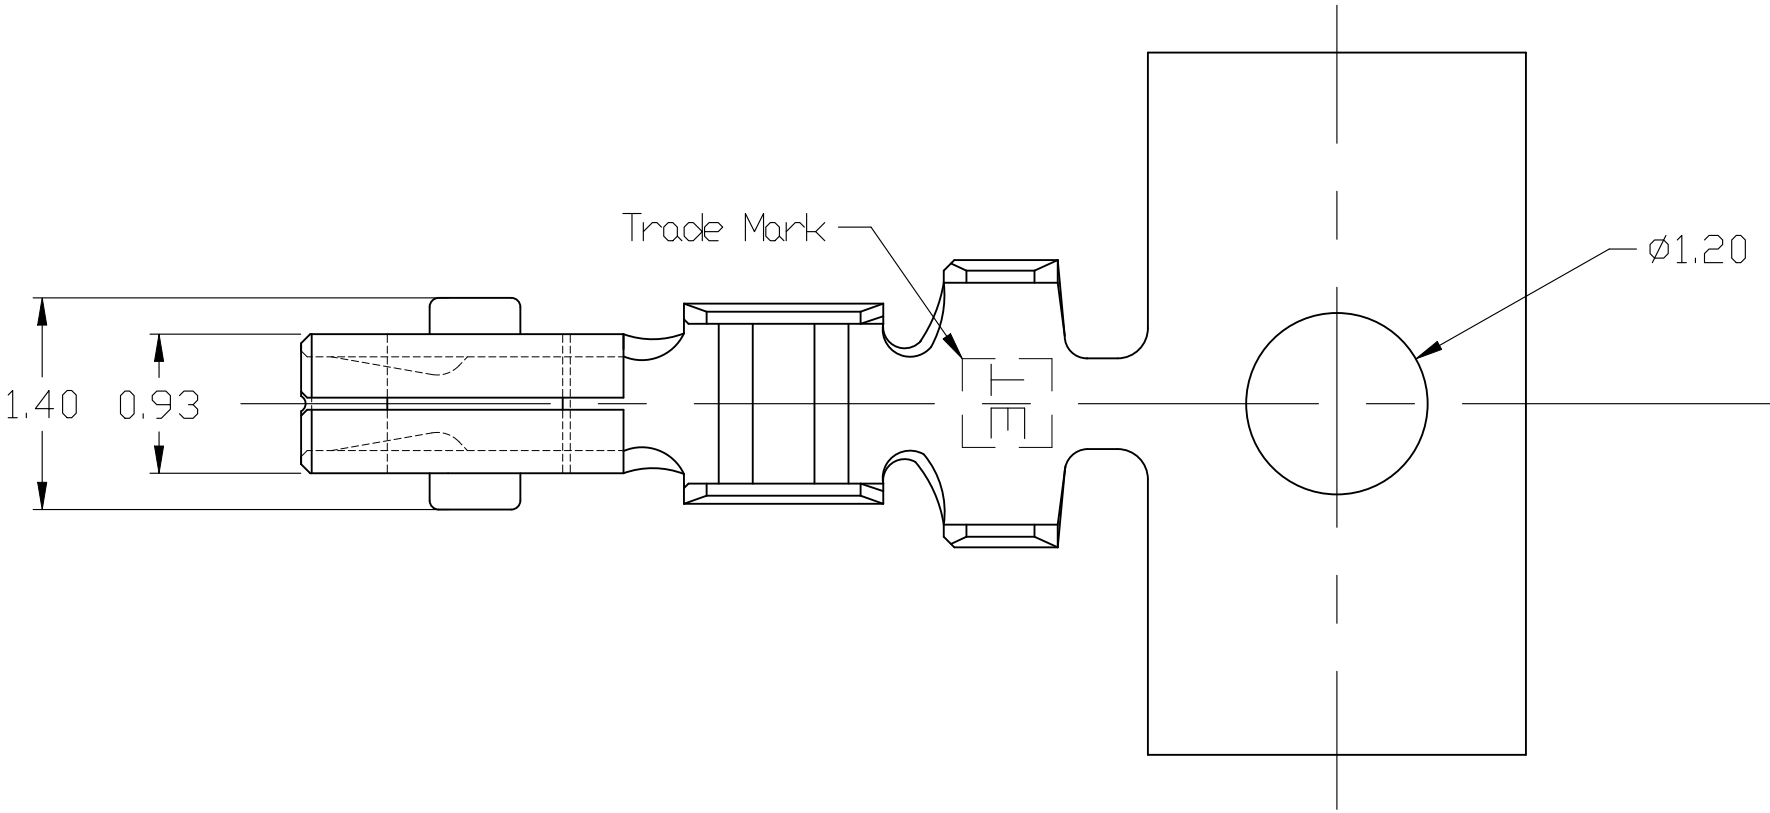
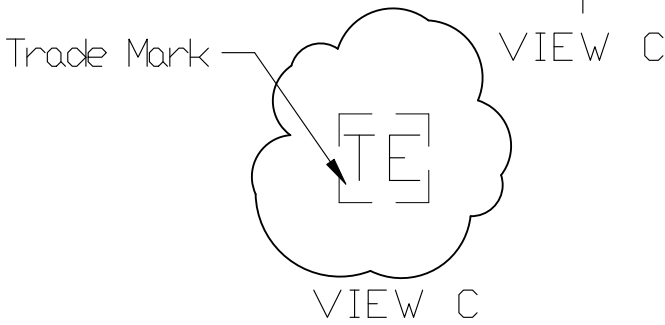
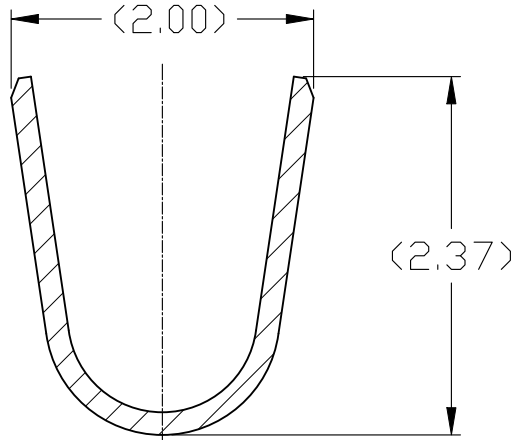
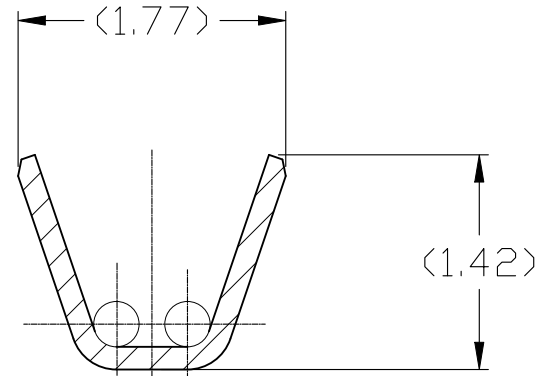
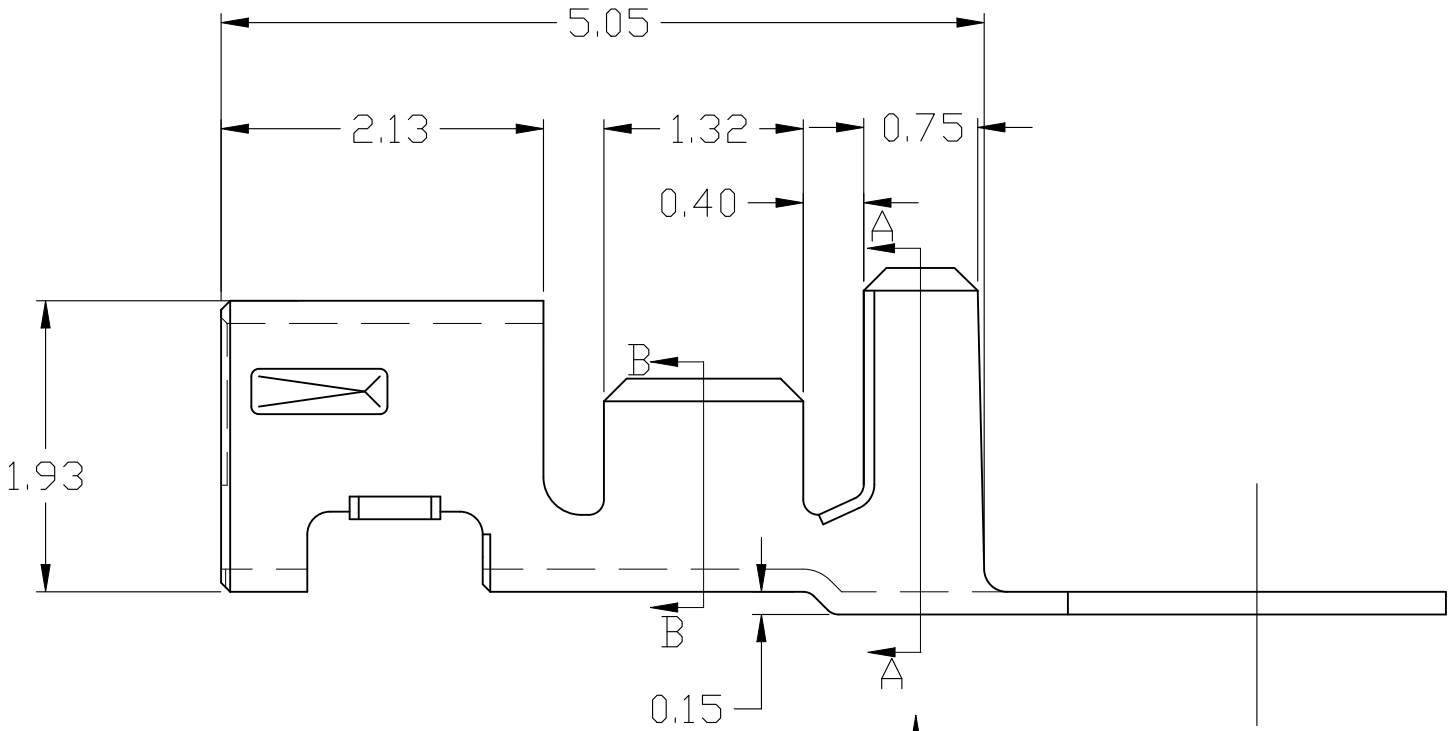


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
J	—		E1	REVISED PER ECR-25-249873	3SEP2025	C.X	J.H

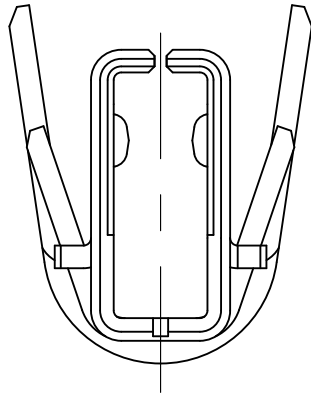

- NOTE
- 1. GENERAL TOLALANCE : $\pm 0.2\text{mm}, \pm 2^\circ$;
 - 2. APPLICABLE PLUG HOUSING P/N:
X-1971030-2~10
 - 3. CRIMPER APPLICATIO P/N: 1999135-2.
HAND TOOL P/N: 1999798-1.



AWG#28~#22 0.089~0.32		Ø0.98~Ø1.58	BRASS H06 Pre-Tin (C2600)		1971031-2	
AWG#28~#22 0.089~0.32		Ø0.98~Ø1.58	PBR H04 Pre-Tin (C5110)		1971031-1	
WIRE RANGE		INSULATION DIA	Material		Part Number	
THIS DRAWING IS A CONTROLLED DOCUMENT.			DWN 23MAR2009 Liu Jimmy CHK 23MAR2009 Wu Hapye APVD 23MAR2009 Zhou Julian PRODUCT SPEC 108-106001 APPLICATION SPEC 114-5425 WEIGHT - CUSTOMER DRAWING			Tyco Electronics Corporation Shanghai, China Grace Inertia Connector 2.0 EV Series Receptacle Contact SIZE A2 CAGE CODE 00779 DRAWING NO C=1971031 RESTRICTED TO -
DIMENSIONS: mm 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -		SCALE 20:1 SHEET 1 of 1 REV E1		